

SMART LED TUBELIGHT



ECO-FRIENDLY



DURABLE



ECONOMICAL

Advantages

- One equals to two traditional t8 tube in the same size.
- Maximum efficiency and minimum glare
- Quick installation and easy maintenance with middle-out wire.
- High-tech optical design
- Batten integrated t8 led light can greatly saving labor cost
- No UV, No lead, No Mercury

Product Specification

Model No.	Power (W)	CCT (k)	Lumens(Lm)	Lm/w	CRI	Beam Angle	Size (mm)
BL-1001	18W	3000/4000/6000K	1710Lm	95Lm/w	>70	120°	38x30x595mm
BL-1001	36W	3000/4000	3420Lm	95Lm/w	>70	120°	38x30x1205mm
BL-1001(eco)	40W	6000K	3420Lm	95Lm/w	>70	120°	38x30x1205mm

CCT Range WW(3000K) NW (4000K) CW (6000K)

Temperature Characteristic T-ambient 25

Temperature

Operating -20~+40°C
Storage -40~+85°C


Humidity

Operating -20~+40°C
Storage -40~+85°C

Electrical Characteristic

input voltage:AC100~240V 50/60Hz
PF:≥ 0.93 THD:≤ 20%
Power Efficiency : ≥ 0.9

Dimension

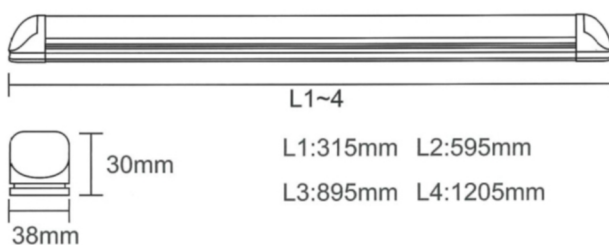

Installation

